


# Classic & Exotic Service, Inc.

**Experts in the Restoration and Maintenance of Prewar Cars**

**Supplier of Specialty Parts for Prewar Cars**

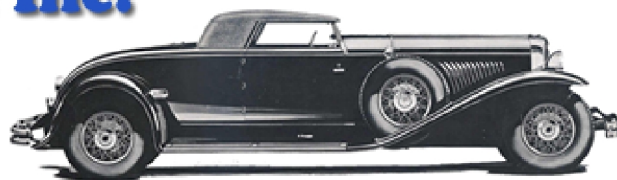


Classic & Exotic Service, Inc.  
 2032 Heide, Troy MI 48084 USA  
 Phone: 1.248.269.9414  
 E-mail: Parts@classicandexotic.com  
 WWW: <http://www.classicandexotic.com>

	SKU	Product Name	Description	Price
<b>Hispano Suiza</b>				
	HIS-0131	Hispano Suiza Horn Wire Junction	Brass horn wire junction for use on Hispano Suiza J-12. Material:Brass;Finish:Natural;Thread:M5-.750, M4-.750;Thread length:M5 10.5mm, M4 15.5mm;Length:40mm;OD:8mm;Mid length:6mm.	\$ 47.00
	HIS-0139	Hispano Suiza Horn Wire Knob	Hispano Suiza horn wire knob. Material: Black plastic with brass insert.	\$ 126.00
<b>Klaxon K-19</b>				
	J-6650-36	Klaxon Horn Motor Screw, Short	Klaxon horn motor screw - short style. Material: SS; Thread: 1/4-24; Length: .595; Thread Length: .595; OAL: .775; Head DIA: 7/16.	\$ 2.50
	J-6550-37	Klaxon Horn Motor Screw, Long	Klaxon horn motor screw - long style. Material: SS; Thread: 1/4-24; Length: 1 1/4; Thread Length: 1 1/4; OAL: 1.420; Head DIA: 7/16.	\$ 5.00
	J-6551	Klaxon K-22 & K-19 Horn Spring Mount	Klaxon Delco horn spring mount. New stainless steel construction with laser cut wafers riveted to stainless spacers. Fits Delco K-19 and Klaxon K-22 horns used on Cadillac Duesenberg, Stutz and other classics of the early 1930's.	\$ 57.75
<b>Klaxon K-22</b>				
	CAD-0013	Klaxon K-22 Horn Nut Wrench	Used to tighten the horn trumpet elbow used on Klaxon K-22 horns. Cadmium plated steel with a special shape to get on the elbow nut in the tight quarters near the radiator and headlight. This wrench has universal application for any car using a K-22 horn.	\$ 38.50
	J-6510	Klaxon Horn 1/4-24 SS Hex Nut	Stainless steel hex nut to fit the bracket on Klaxon K-22 horns as installed on Duesenberg, Cadillac and other automobiles of the 1920's and 1930's. Measures 7/16 x 3/16; Thread: 1/4-24.	\$ 2.50
	J-6550-1	Klaxon K-22 Horn Trumpet 5" Bell	Brass horn trumpet with 5" bell for use on Klaxon K-22 horns as used on Duesenberg, Cadillac and many other cars of the era using K-22 horns equipped with 5" bells. OAL 11 1/4; Thread: 1 1/16-18; Hex: 1 1/8.	\$ 188.50

	SKU	Product Name	Description	Price
	J-6550-1A	Klaxon K-22 Horn Trumpet 5 1/2" Bell	Brass horn trumpet with 5 1/2" bell for use on Klaxon K-22 horns as used on Duesenberg, Cadillac and many other cars of the era using K-22 horns equipped with 5 1/2" bells. OAL: 11 1/2; Thread: 1 1/16-18; Hex: 1 1/8.	\$ 188.50
	J-6550-4	Klaxon K-22 Horn Motor Base	Fully machined aluminum casting threaded to fit the elbow for the Klaxon horn trumpet. For use with automobiles of the 1920's and 1930's using Klaxon K-22 horns including Cadillac V-16, Duesenberg and others.	\$ 231.00
	J-6550-5	Klaxon K-22 Horn Motor Cover, Chrome Plated	Chrome plated brass horn cover for Klaxon K-22 horns perfect reproduction. For use with automobiles of the 1920's and 1930's using Klaxon K-22 horns including Cadillac V-16, Duesenberg and others. Measures: approx 2.300 high; base is approx. 4" wide.	\$ 297.00
	J-6550-5-U	Klaxon K-22 Horn Motor Cover, Unplated Brass	Brass horn cover for Klaxon K-22 horns perfect reproduction. For use with automobiles of the 1920's and 1930's using Klaxon K-22 horns including Cadillac V-16, Duesenberg and others. Height: Approx 2.300; Base OD: 4.00; ID: 3.849.	\$ 181.50
	J-6550-21	Klaxon K-22 Horn Contact Connector	Klaxon K-22 horn contact connector. Material: Steel; Finish: Cadmium; Thread: 8-32; Thickness: .056; Hole ID: .276; Length corner to corner: 2.100; Width section with tapped hole: .333; Width section with three holes: .655.	\$ 11.00
	J-6550-30	Klaxon K-22 Horn Elbow Assembly	Bronze elbow with a captive nut. Used to attach the Klaxon trumpet horn to the base. For use with automobiles of the 1920's and 1930's using Klaxon K-22 horns including Cadillac V-16, Duesenberg and others.	\$ 140.50
	J-6550-31 J-6550-31-A	Klaxon K-22 Horn Trumpet Projector Screen	Copper mesh screen inserted into K-22 Klaxon horn trumpets as used on Duesenberg Cadillac and others. Must be nickel-chrome plated prior to installation. Two sizes available: 2 3/4 OD and 2 15/16 OD. 2 3/4 OD screen for use with our trumpets, part numbers J-6550-1 and J-6550-1A. Material: Copper; Finish: Natural.	\$ 44.00
	J-6550-34	Klaxon K-22 Horn Tag	New aluminum tag with black background. For use with all cars using Klaxon K-22 horns. Measures: 2 3/4 x 1/2; Distance between hole centers is 2.292 inches.	\$ 30.00

	SKU	Product Name	Description	Price
	J-6550-35	Klaxon K-22 Horn Trumpet Threaded Sleeve	Brass horn trumpet threaded sleeve for use on Klaxon K-22 horns as used on Duesenberg, Cadillac and other cars of the era using K-22 horns. Thread: 1 1/16-18; Hex: 1 1/8; ID: .850; Height: .541.	\$ 38.50
	J-6650-36	Klaxon Horn Motor Screw, Short	Klaxon horn motor screw - short style. Material: SS; Thread: 1/4-24; Length: .595; Thread Length: .595; OAL: .775; Head DIA: 7/16.	\$ 2.50
	J-6550-37	Klaxon Horn Motor Screw, Long	Klaxon horn motor screw - long style. Material: SS; Thread: 1/4-24; Length: 1 1/4; Thread Length: 1 1/4; OAL: 1.420; Head DIA: 7/16.	\$ 5.00
	J-6550-38	Klaxon K-22 Horn Cover Square Head Screw	Cadmium plated square head screw for the horn cover on Klaxon K-22 horns. For use on Duesenberg Model J and Cadillac models using K-22 horns. Material: 12L14 Steel; Finish: Cadmium; Thread: 10-32; Thread length: .568; OAL: .700; Length under head: .631; Head: .288 x .341 x .069.	\$ 4.00
	J-6550-39	Klaxon K-22 Horn 1/4-24 Hex Nut	1/4-24 Hex nut for use on Klaxon K-22 horns. Material: 303 Stainless steel; Finish: Natural; Thread: 1/4-24; Hex: 7/16; Thickness: .167.	\$ 2.50
	J-6551	Klaxon K-22 & K-19 Horn Spring Mount	Klaxon Delco horn spring mount. New stainless steel construction with laser cut wafers riveted to stainless spacers. Fits Delco K-19 and Klaxon K-22 horns used on Cadillac Duesenberg, Stutz and other classics of the early 1930's.	\$ 57.75
	MISC-0462	Klaxon K-22 Horn Gasket	Klaxon K-22 horn gasket. Laser cut from 1/64 gasket paper. Material: Gasket paper; OD: 5.031; ID: 4.156; Thickness: 1/64; Thru hole ID: .265.	\$ 8.50
<b>Sparton</b>				
	MISC-0454	Sparton Horn Bracket	Sparton horn bracket. Part of a four piece assembly for mounting a Sparton horn to Cord L-29 and other makes. Material: Steel; Finish: Natural; OAL: 2.375; OAW: 1.250; Horn mount holes: .243; Base mount holes: .265; Thickness: 3/16; Mounting hole center: 1.000.	\$ 5.50
	MISC-0455	Sparton Horn Bracket Spring Spacer	Spacer used as part of the spring mount bracket assembly for Sparton horns as used on Cord L-29 and other makes. Material: Steel; Finish: Natural; OAL: 1 9/16; Width: 9/16; Thickness: .062; Thru hole ID: .250.	\$ 6.00
	MISC-0456	Sparton Horn Bracket Spring Support	Spring support used as part of the spring mount bracket assembly for Sparton horns as used on Cord L-29 and other makes. Material: Steel; Finish: Natural; OAL: 1 9/16; Width: 9/16; Thickness: .088; Thru hole ID: .261.	\$ 5.50

	SKU	Product Name	Description	Price
	MISC-0457	Sparton Horn Bracket Spring	Sparton horn bracket spring for use on Cord L-29 and other makes. Laser cut from stainless steel. Material: 304 SS; Finish: Natural; Length: 1.815; Width: 1.562; Thickness: .020; Thru hole ID: .258.	\$ 9.00

# Terms and Conditions

## Returns

Items must be returned in new unused condition within 14 days of receipt. Items returned after 14 days of receipt are subject to a 15% restocking fee. No returns will be accepted after 90 days from the original purchase date. Original shipping charges are non-refundable. Refunds will be issued upon receipt and inspection of the returned item and will be issued in the manner payment was received. For returns made after 60 days, refunds will be issued by check only.

Items which are cut to order and sold by the foot and items made to customer specified lengths or widths are not returnable.

When returning an item, please include a copy of your original invoice and send the item to:

Classic & Exotic Service, Inc.  
Attn: Returns  
2032 Heide (USPS only)  
2000 Heide (UPS, FedEx only)  
Troy, MI 48084 USA

All returns must be mailed - we cannot accommodate in-person returns.

## Delivery

We ship worldwide Monday through Friday. Our normal handling time is 24 hours or less - many orders ship the same day they are placed. Some items may require an additional handling time - see individual product descriptions for information.

Expedited domestic shipping is through UPS. For expedited UPS shipping, orders must be received by 1PM EST. Orders received after 1PM EST will ship the next business day. UPS business days are Monday - Friday. Next Day Air orders placed on Friday will be delivered on Monday.

In some instances, non-expedited domestic orders may be shipped by USPS Priority Mail at our discretion. If your order must be shipped by UPS Ground, please note that when placing your order.

International shipping is through USPS Express Mail or UPS Worldwide services.

We do not ship by Fedex - that includes domestic and international orders.

Shipping cost is determined by package weight and shipment destination. Shipping cost for your order can be viewed in your shopping cart by entering a shipment destination.